

CLEAR OPENING HEIGHT Hu [mm]	CLEAR OPENING WIDTH Su [mm]																							
	601 - 1 000	1 001 - 1 500	1 501 - 2 000	2 001 - 2 500	2 501 - 3 000	3 001 - 3 500	3 501 - 4 000	4 001 - 4 500	4 501 - 5 000	5 001 - 5 500	5 501 - 6 000	6 001 - 6 500	6 501 - 7 000	7 001 - 7 500	7 501 - 8 000	8 001 - 8 500	8 501 - 9 000	9 001 - 9 500	9 501 - 10 000	10 001 - 10 500	10 501 - 11 000	11 001 - 11 500	11 501 - 12 000	
9751 - 10 000	2	2	3	3	5	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	7	7	
9 501 - 9 750	2	2	3	3	5	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	7	7	
9 251 - 9 500	2	2	3	3	3	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	7	7	
9 001 - 9 250	1	2	2	3	3	5	5	5	5	6	6	6	6	7	7	7	7	7	7	7	7	7	7	
8 751 - 9 000	1	2	2	3	3	5	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	7	
8 851 - 8 750	1	2	2	3	3	5	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	7	
8 251 - 8 500	1	2	2	3	3	5	4	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	
8 001 - 8 250	1	2	2	3	3	3	4	5	5	5	6	6	6	6	6	7	7	7	7	7	7	7	7	
7 751 - 8 000	1	2	2	3	3	3	4	5	5	5	6	6	6	6	6	6	7	7	7	7	7	7	7	
7 501 - 7 750	1	2	2	2	3	3	4	5	5	5	6	6	6	6	6	6	6	7	7	7	7	7	7	
7 251 - 7 500	1	2	2	2	3	3	4	4	5	5	6	6	6	6	6	6	6	7	7	7	7	7	7	
7 001 - 7 250	1	2	2	2	3	3	3	4	5	5	6	6	6	6	6	6	6	7	7	7	7	7	7	
6 751 - 7 000	1	2	2	2	3	3	3	4	4	5	6	6	6	6	6	6	6	7	7	7	7	7	7	
6 501 - 6 750	1	1	2	2	2	3	3	3	4	5	6	6	6	6	6	6	6	7	7	7	7	7	7	
6 251 - 6 500	1	1	2	2	2	3	3	3	4	4	5	6	6	6	6	6	6	7	7	7	7	7	7	
6 001 - 6 250	1	1	2	2	2	3	3	3	4	4	5	6	6	6	6	6	6	7	7	7	7	7	7	
5 751 - 6 000	1	1	2	2	2	3	3	3	4	4	5	6	6	6	6	6	6	7	7	7	7	7	7	
5 501 - 5 750	1	1	2	2	2	3	3	3	3	4	4	6	6	6	6	6	6	6	7	7	7	7	7	
5 251 - 5 500	1	1	2	2	2	3	3	3	3	4	4	6	6	6	6	6	6	6	7	7	7	7	7	
5 001 - 5 250	1	1	1	2	2	2	3	3	3	4	4	4	6	6	6	6	6	6	6	7	7	7	7	
4 751 - 5 000	1	1	1	2	2	2	3	3	3	4	4	4	4	6	6	6	6	6	6	7	7	7	7	
4 501 - 4 750	1	1	1	2	2	2	3	3	3	3	4	4	4	6	6	6	6	6	6	6	7	7	7	
4 251 - 4 500	1	1	1	2	2	2	2	3	3	3	3	4	4	4	6	6	6	6	6	6	6	7	7	
4 001 - 4 250	1	1	1	1	2	2	2	3	3	3	3	4	4	4	6	6	6	6	6	6	6	6	7	
3 751 - 4 000	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	6	6	6	6	6	6	6	6	
3 501 - 3 750	1	1	1	1	2	2	2	2	2	3	3	3	4	4	4	6	6	6	6	6	6	6	6	
3 251 - 3 500	1	1	1	1	1	2	2	2	2	2	3	3	3	4	4	5	6	6	6	6	6	6	6	
3 001 - 3 250	1	1	1	1	1	2	2	2	2	2	3	3	3	4	4	5	5	6	6	6	6	6	6	
2 751 - 3 000	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	5	5	5	6	6	6	6	6	
2 501 - 2 750	1	1	1	1	1	1	1	2	2	2	2	3	3	4	4	4	4	5	5	6	6	6	6	
2 251 - 2 500	1	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	5	6	6	6	6	
2 001 - 2 250	1	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	4	6	6	6	6	
1 751 - 2 000	1	1	1	1	1	1	1	2	2	2	2	2	3	3	4	4	4	4	4	4	4	6	6	
1 501 - 1 750	1	1	1	1	1	1	1	1	2	2	2	2	2	3	4	4	4	4	4	5	4	4	4	
1 251 - 1 500	1	1	1	1	1	1	1	1	1	2	2	2	2	2	3	3	4	4	4	4	4	4	4	
1 001 - 1 250	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	3	3	3	3	4	4	4	4	
100 - 1 000	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	3	3	3	3	4	4	4	4	

MARKING OF DRIVES

- ☐ - power supply before the main switch (guaranteed) necessary to close the gate
- Z - external drive
- P - fire resistant cables must be connected to the connection
- Gr - gravity operated drive
- 230 - the value of the voltage applied to the control panel [V]
- /4 - minimum connection value [A]

DIAGRAM LEGEND

HOUSING
DIMENSIONS
Sk x Hk [mm]

- | | |
|---|-----------|
|  | 600 x 625 |
|  | 550 x 575 |
|  | 500 x 525 |
|  | 450 x 475 |
|  | 400 x 425 |
|  | 350 x 375 |
|  | 300 x 325 |
|  | 250 x 275 |



DRIVE TYPE

- | | |
|---|--------------------------|
| 1 | VIC-0122
[Gr230/24/2] |
| 2 | VIC-0123
[Gr230/24/2] |
| 3 | VIC-0124
[Gr230/24/2] |
| 4 | VIC-0461
[Gr230/24/4] |
| 5 | VIC-0242
[ZGr400/2] |
| 6 | VIC-0243
[ZGr400/3] |
| 7 | VIC-0244
[ZGr400/5] |



FIRE PROtec EI 60 MARC

version 2023/A

Wall mounting (with the internal drive)

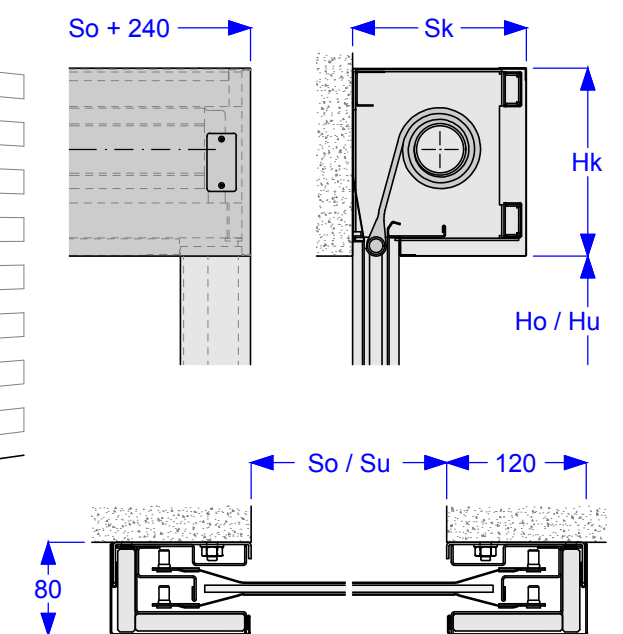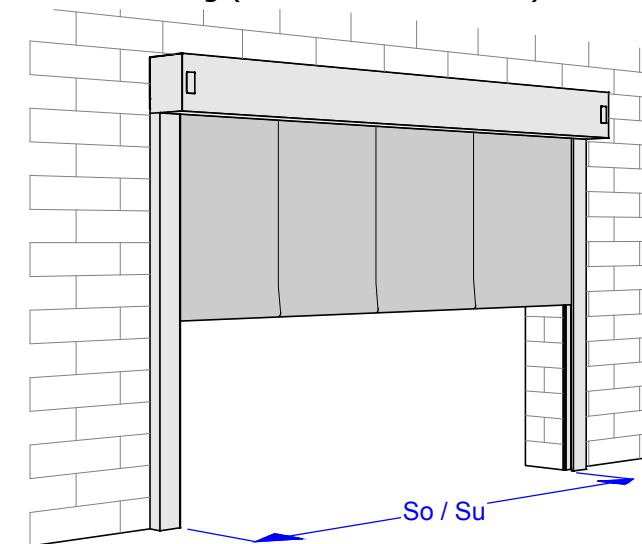

Cross corridor mounting (with the internal drive)

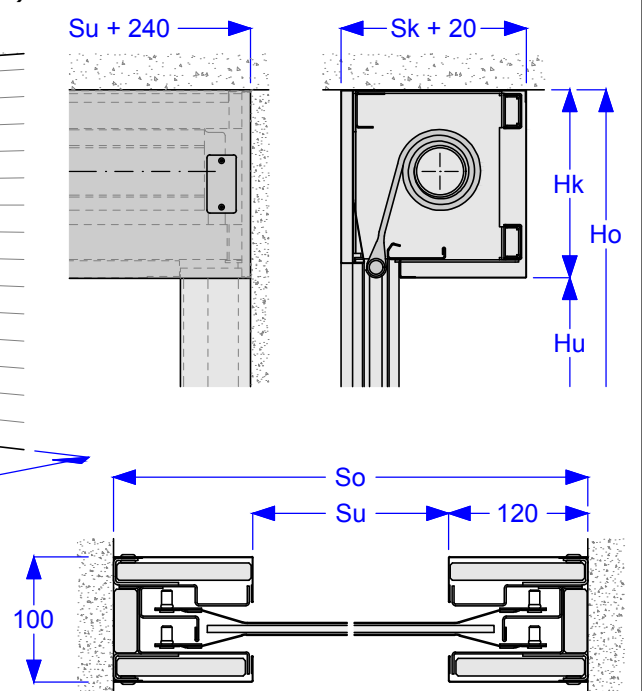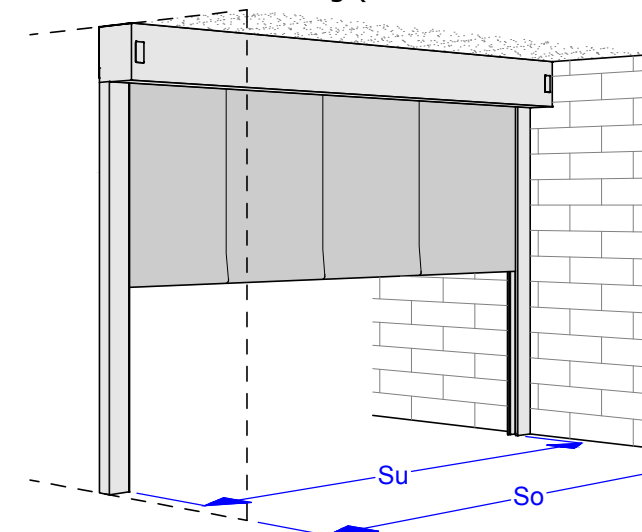

1 All dimensions are in millimeters [mm]

Notations used in the drawings:

- So - structural / wall opening width
- Su - clear opening width
- Ho - structural / wall opening height
- Hu - clear opening height
- Sk - housing width
- Hk - housing height

NOTICE

In the case of the cross corridor mounting, there should be an installation clearance of 10 mm per side.