Lichte Höhe / Clear opening height LH [mm]	750 - 1000	1001 - 1500	1501 - 2000	2001 - 2500	2501 - 3000	3001 - 3500	3501 - 4000	4001 - 4500	4501 - 5000	5001 - 5500	5501 - 6000	6001 - 6500	6501 - 7000	7001 - 7500	7501 - 8000	8001 - 8500	8501 - 9000	9001 - 9500	9501 - 10000	10001 - 10500	10501 - 11000	11001 - 11500	11501 - 12000
9751 - 10000	2	2	3	3	4	4	4	4	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6
9501 - 9750	2	2	3	3	4	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6
9251 - 9500	2	2	3	3	3	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6
9001 - 9250	1	2	2	3	3	4	4	4	4	5	5	5	5	5	6	6	6	6	6	6	6	6	6
8751 - 9000	1	2	2	3	3	4	4	5	4	5	5	5	5	5	5	6	6	6	6	6	6	6	6
8501 - 8750	1	2	2	3	3	4	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6	6	6
8251 - 8500	1	2	2	3	3	4	4	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6	6
8001 - 8250	1	2	2	3	3	3	4	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6	6
7751 - 8000	1	2	2	3	3	3	4	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
7501 - 7750	1	2	2	2	3	3	4	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
7251 - 7500	1	2	2	2	3	3	4	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
7001 - 7250	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
6751 - 7000	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
6501 - 6750	1	1	2	2	2	3	3	3	4	4	5	5	5	5	5	5	5	6	6	6	6	6	6
6251 - 6500	1	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6
6001 - 6250	1	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	6	6	6	6	6	6
5751 - 6000	1	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	5	6	6	6	6	6
5501 - 5750	1	1	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	6	6	6	6	6
5251 - 5500	1	1	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	6	6	6	6	6
5001 - 5250	1	1	1	2	2	2	3	3	3	4	4	5	5	5	5	5	5	5	5	6	6	6	6
4751 - 5000	1	1	1	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	5	6	6	6	6
4501 - 4750	1	1	1	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	5	6	6	6
4251 - 4500	1	1	1	2	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	5	6	6
4001 - 4250	1	1	1	1	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	5	5	6
3751 - 4000	1	1	1	1	2	2	2	2	3	3	3	3	4	4	5	5	5	5	5	5	5	5	5
3501 - 3750	1	1	1	1	2	2	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	5	5
3251 - 3500	1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	5	5
3001 - 3250	1	1	1	1	1	2	2	2	2	2	3	3	3	4	4	4	4	5	5	5	5	5	5
2751 - 3000	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	4	5	5	5	5	5
2501 - 2750	1	1	1	1	1	1	1	2	2	2	2	3	3	4	4	4	4	4	4	5	5	5	5
2251 - 2500	1	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	4	5	5	5	5
2001 - 2250	1	1	1	1	1	1	1	2	2	2	2	3	3	3	4	4	4	4	4	5	5	5	5
1751 - 2000	1	1	1	1	1	1	1	2	2	2	2	2	3	3	4	4	4	4	4	5	5	5	5
1501 - 1750	1	1	1	1	1	1	1	1	2	2	2	2	2	2	3	4	4	4	4	5	5	5	5
1251 - 1500	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	3	3	4	4	4	5	5	5
1001 - 1250	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	3	3	3	3	4	4	4	4
100 - 1000	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	3	3	3	3	4	4	4	4

Lichte Breite / Clear opening width LB [mm]

-vereinfachte Montage / simplified assembly

Mindestabmessung am Kasten / Minimum dimensions required on head B x H [mm]:

- 250 x 275
- 300 x 325
- 350 x 375
- 400 x 425
- 450 x 475
- 500 x 525
- 550 x 575
- 600 x 625

Elektrische VIC - Antriebe mit Schwerkraftbetrieb / Dedicated VIC electric drives with gravity operation

- Interner Motor / internal motors:
  - 1 - VIC-0122 [230V AC, 1.2A, 265W]
  - 2 - VIC-0123 [230V AC, 1.9A, 435W]]
  - 3 - VIC-0124 [230V AC, 1.9A, 435W]
- Externer Motor / external motors:
  - 4 - VIC-0242 [3x400V AC, 2A, 450W]
  - 5 - VIC-0243 [3x400V AC, 2.7A, 900W]
  - 6 - VIC-0244 [3x400V AC, 4.1A, 1100W]

1. Wandmontage / wall mounting:

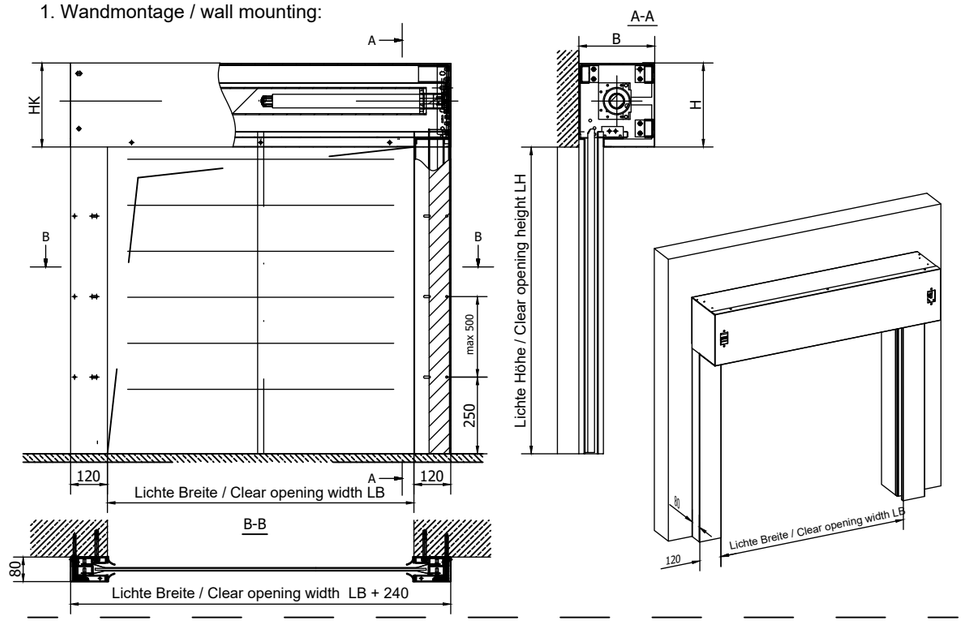

2. Sturz - Deckenmontage / Niche - ceiling mounting:

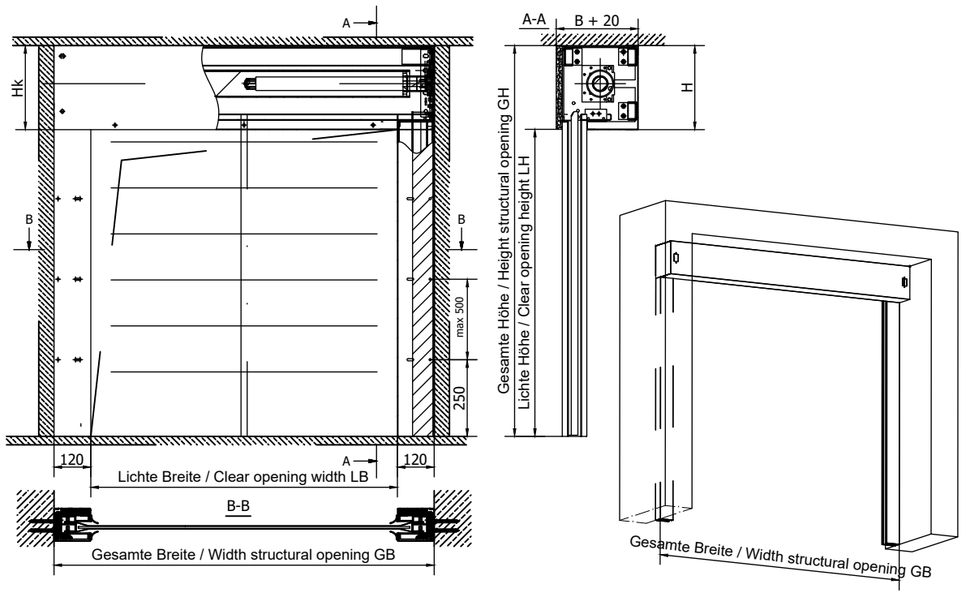

Project: Fire PROtec - EI 60		Scale: 1 : 20	Page: 1 / 1
Part Number: Fire PROtec - EI 60 Diagramm	Revision: 1.0	SIMON PROtec Systems GmbH Medienstraße 8 D – 94036 Passau Tel.: +49 (0)851 98870-0 Fax.: +49 (0)851 98870-70	
Check/Approval: 10.03.2021 – C. Schneider			
Designed/Drawed: 10.03.2021 – P. Bersuch			

Installation Proposal Sketch! — no warranty for function and accuracy!

All shown details like fixing of brackets and position of actuator are a parts of an installation proposal without any guarantee.

Please inspect all relevant details in order to ensure a similar execution like the shown installation proposal.
The user is responsible for the final realization.

Please check the fixing points to avoid problems with stability and collision with other parts.

SIMON
we create fire safety